

AD-A192 664

AD-F30106-77

(4)

AD

DTIC FILE COPY

TECHNICAL REPORT BRL-TR-2860

DESIGN OPTIMIZATION FOR A HIGH  
PERFORMANCE REGENERATIVE  
LIQUID PROPELLANT GUN

PAUL G. BAER  
TERENCE P. COFFEE  
WALTER F. MORRISON

OCTOBER 1987

DTIC  
ELECTE  
MAR 24 1988  
S E D

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED.

US ARMY BALLISTIC RESEARCH LABORATORY  
ABERDEEN PROVING GROUND, MARYLAND

88 3 22 101

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188 Exp. Date: Jun 30, 1986	
1a. REPORT SECURITY CLASSIFICATION Unclassified			1b. RESTRICTIVE MARKINGS		
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION/AVAILABILITY OF REPORT		
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE					
4. PERFORMING ORGANIZATION REPORT NUMBER(S) BRL-TR-2860			5. MONITORING ORGANIZATION REPORT NUMBER(S)		
6a. NAME OF PERFORMING ORGANIZATION US Army Ballistic Rsch Lab		6b. OFFICE SYMBOL (If applicable) SLCBB-IB	7a. NAME OF MONITORING ORGANIZATION		
6c. ADDRESS (City, State, and ZIP Code) Aberdeen Proving Ground, MD 21005-5066			7b. ADDRESS (City, State, and ZIP Code)		
8a. NAME OF FUNDING/SPONSORING ORGANIZATION		8b. OFFICE SYMBOL (If applicable)	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER		
8c. ADDRESS (City, State, and ZIP Code)			10. SOURCE OF FUNDING NUMBERS		
PROGRAM ELEMENT NO.		PROJECT NO.	TASK NO.	WORK UNIT ACCESSION NO.	
11. TITLE (Include Security Classification)  DESIGN OPTIMIZATION FOR A HIGH PERFORMANCE REGENERATIVE LIQUID PROPELLANT GUN					
12. PERSONAL AUTHOR(S) Baer, Paul G., Coffee, Terence P. and Morrison, Walter F.					
13a. TYPE OF REPORT TR		13b. TIME COVERED FROM _____ TO _____		14. DATE OF REPORT (Year, Month, Day)	
15. PAGE COUNT					
16. SUPPLEMENTARY NOTATION					
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)		
FIELD	GROUP	SUB-GROUP	liquid monopropellant, 120-mm gun		
			regenerative gun, 140-mm gun		
			lumped parameter model		
19. ABSTRACT (Continue on reverse if necessary and identify by block number) <p>The regenerative liquid propellant gun (RLPG) concept offers a possible replacement for solid propellant (SP) cannons on future battle tanks. The current 120-mm gun using JA2 granular propellant develops a maximum pressure of 519 MPa and accelerates a 7.12 kg projectile to 1670 m/s in a projectile travel of 4.75 m. The advantages of the RLPG relative to the equivalent SP gun are: (1) more ammunition storage aboard the tank; (2) mechanical control of injection which results in a flat-topped pressure-time curve and thus a higher muzzle velocity for a given maximum pressure; and (3) no secondary muzzle flash. The disadvantages include greater mechanical complexity and higher maximum breech pressures (in the liquid reservoir) than in the SP case.</p> <p>Simulation studies have been made of a high performance 120-mm RLPG tank cannon. The ground rules used in the study are: (1) maximum projectile travel of 6.3 m; (2) maximum liquid pressure of 700 MPa; (3) maximum combustion pressure of about 500 MPa; and (4)</p>					
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT <input checked="" type="checkbox"/> UNCLASSIFIED, UNLIMITED <input type="checkbox"/> SAME AS RPT <input type="checkbox"/> DTIC USERS			21. ABSTRACT SECURITY CLASSIFICATION Unclassified		
22a. NAME OF RESPONSIBLE INDIVIDUAL Paul G. Baer			22b. TELEPHONE (Include Area Code) (301) 278-6187		22c. OFFICE SYMBOL SLCBB-IB-B

UNCLASSIFIED

19. ABSTRACT (Con't)

constant injection area. Three liquid propellants were considered; hydroxyl ammonium nitrate (HAN) propellants LGP1845 and LGP1846; and a hypothetical "liquid" JA2 propellant. The in-bore projectile mass was varied from 5 to 13 kg. The results show that a high performance RLPG tank gun provides a muzzle velocity equivalent to that of a comparable SP gun. (Keywords: ) →

Initial studies were performed on the effect of substituting a 140-mm gun for the present 120-mm gun. Only small increases in performance were obtained.

# TABLE OF CONTENTS

	<u>Page</u>
LIST OF FIGURES	v
LIST OF TABLES	vii
I. INTRODUCTION	1
II. SIMULATION MODELS	4
1. SABOT MODEL	4
2. SP AND RLPG INTERIOR BALLISTIC MODELS	4
III. GROUND RULES	
1. PROJECTILE DESIGN	5
2. RLPG GUN DESIGN	5
3. INTERIOR BALLISTIC SIMULATIONS - 120-mm GUN	10
4. INTERIOR BALLISTIC SIMULATIONS - 140-mm GUN	17
IV. DISCUSSION AND CONCLUSIONS	22
REFERENCES	25
DISTRIBUTION LIST	27

Accession For	
NTIS CRANI	<input checked="" type="checkbox"/>
ERIC TAG	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
DIST	Avail and/or Special
A-1	



# LIST OF FIGURES

<u>Figure</u>		<u>Page</u>
1	Cutaway View of M1A1-LP Vehicle	2
2	Reverse Annular Piston RLPG, External Configuration	3
3	Reverse Annular Piston RLPG, Internal Configuration	6
4	In-Line Annular Piston RLPG, Internal Configuration	7
5	Muzzle Velocity vs Loading Density for the RLPG Using the Lightest Projectile, 120-mm Gun.	11
6	Muzzle Velocity vs Loading Density for the RLPG Using the Heaviest Projectile, 120-mm Gun.	12
7	Muzzle Velocity vs Charge to Mass Ratio for the RLPG Using the Lightest Projectile, 120-mm Gun.	13
8	Muzzle Velocity vs Charge to Mass Ratio for the RLPG Using the Heaviest Projectile, 120-mm Gun.	14
9	Muzzle Velocity vs Projectile Weight for Liquid JA2 (line), HAN1845 (dot), and HAN1846 (dash), 120-mm Gun.	15
10	Muzzle Velocity vs Projectile Weight for Liquid JA2 (line), and Solid Propellant at Two Loading Densities [0.75 g/cc (dot) and 0.95 g/cc(dash)], 120-mm Gun.	16
11	Muzzle Velocity vs Loading Density For Liquid JA2 (line) and Solid Propellant (dot). Cases with a 7.12 kg Projectile, 120-mm Gun.	17
12	Muzzle Velocity vs Loading Density for the RLPG Using the Lightest Projectile, 140-mm Gun.	18
13	Muzzle Velocity vs Loading Density for the RLPG Using the Heaviest Projectile, 140-mm Gun.	19
14	Muzzle Velocity vs Charge to Mass Ratio for the RLPG Using the Lightest Projectile, 140-mm Gun.	20
15	Muzzle Velocity vs Charge to Mass Ratio for the RLPG Using the Heaviest Projectile, 140-mm Gun.	21

LIST OF FIGURES (CON'T)

16	Muzzle Velocity vs Projectile Weight for Liquid JA2. 120-mm Gun (line). 140-mm Gun (dot).	22
----	--	----

## LIST OF TABLES

<u>Table</u>		<u>Page</u>
1	Reverse Annular Piston Gun Dimensions	5
2	In Line Piston Gun Dimensions	8
3	Propellant Properties	9
4	Projectile Properties	9

## I. INTRODUCTION

The regenerative liquid propellant (RLPG) gun concept offers a possible replacement for solid propellant cannons on future battle tanks. The current 120-mm solid propellant (SP) gun using JA2 granular propellant develops a maximum pressure of 519 MPa and accelerates a 7.12 kg projectile to 1670 m/s in a projectile travel of 4.75 m. The advantages of the RLPG relative to the equivalent SP gun are:

a. More ammunition can be stored aboard the tank. The liquid propellant occupies significantly less space than does the equivalent solid propellant charges. This results in an increase in the number of rounds from 40 to 56.<sup>1</sup>

b. Mechanical control of the rate of injection of liquid propellant into the gun combustion chamber can be used to shape the pressure-time curve. Optimum control will result in a flat-topped pressure-time curve and a higher muzzle velocity for a given maximum chamber pressure.

c. There is no secondary muzzle flash, since liquid propellant combustion products will not react with air.<sup>2</sup>

The disadvantages of the RLPG are:

a. Greater mechanical complexity, because of the presence of a regenerative propellant injection mechanism in the breech of the gun.

b. Higher breech pressures because of the hydraulic differential pressure needed to inject the liquid into the combustion chamber. This can amount to a pressure increase of about 200 MPa, requiring a heavier gun.

In this study we investigate the ballistic performance of a conceptual 120-mm RLPG in comparison with an equivalent solid propellant system. Both SP and RLPG interior ballistic simulation models were used in this study to evaluate ballistic performance and to provide guidelines for the design of such a gun.

This interior ballistics study was performed as part of a more detailed systems study investigating the application of the RLPG in a tank.<sup>1</sup> Figures 1 and 2 from that study show a cutaway view of the conceptual RLPG tank cannon mounted in the modified M1A1 vehicle and an external view of the RLPG cannon.



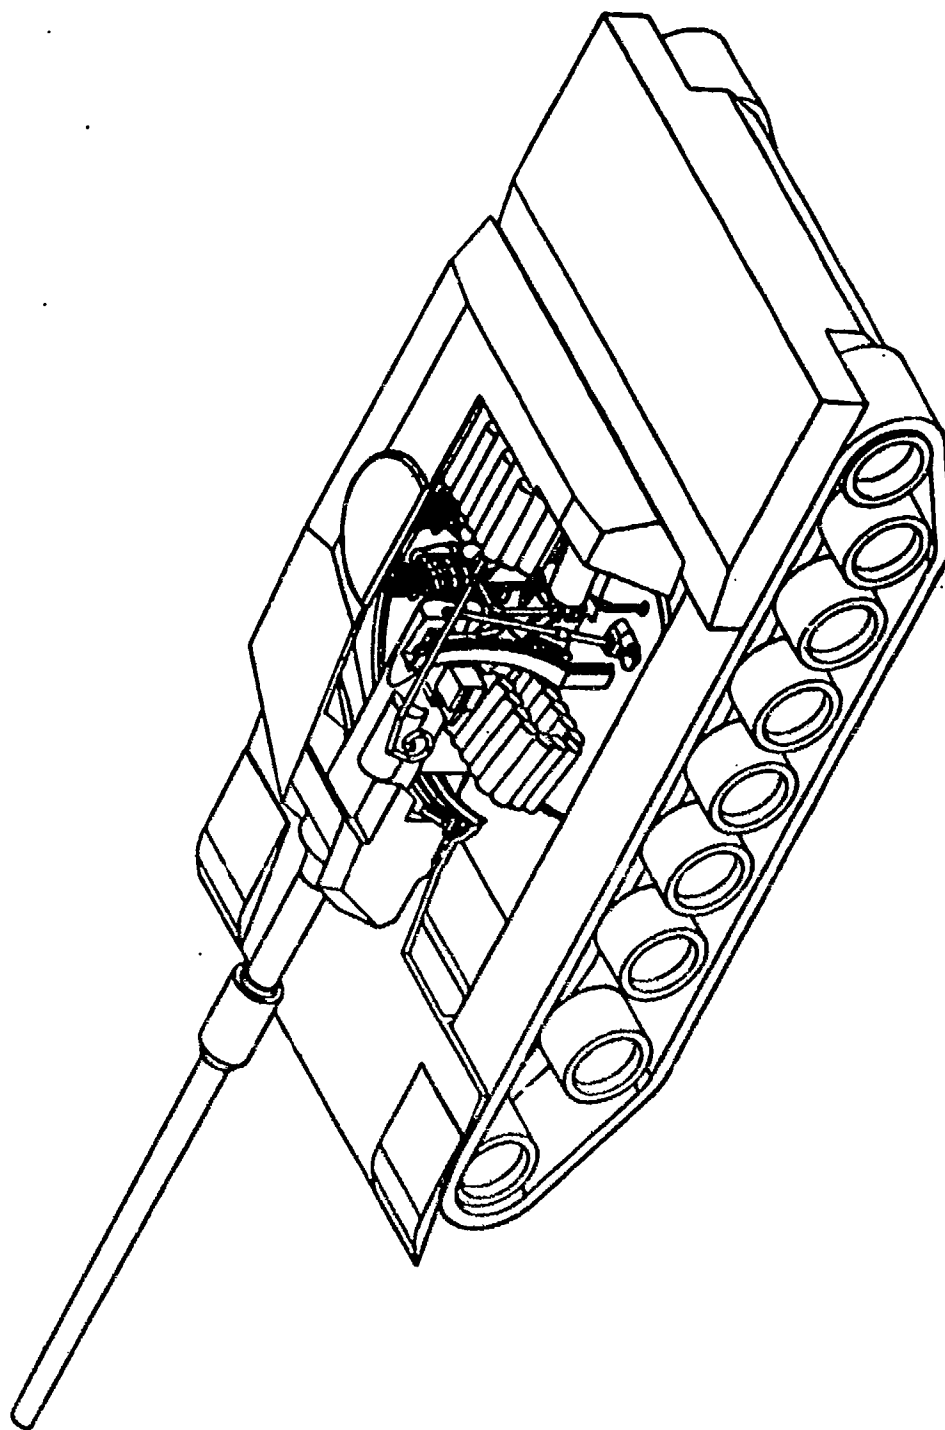


Figure 1. Cutaway View of M1A1-LP Vehicle

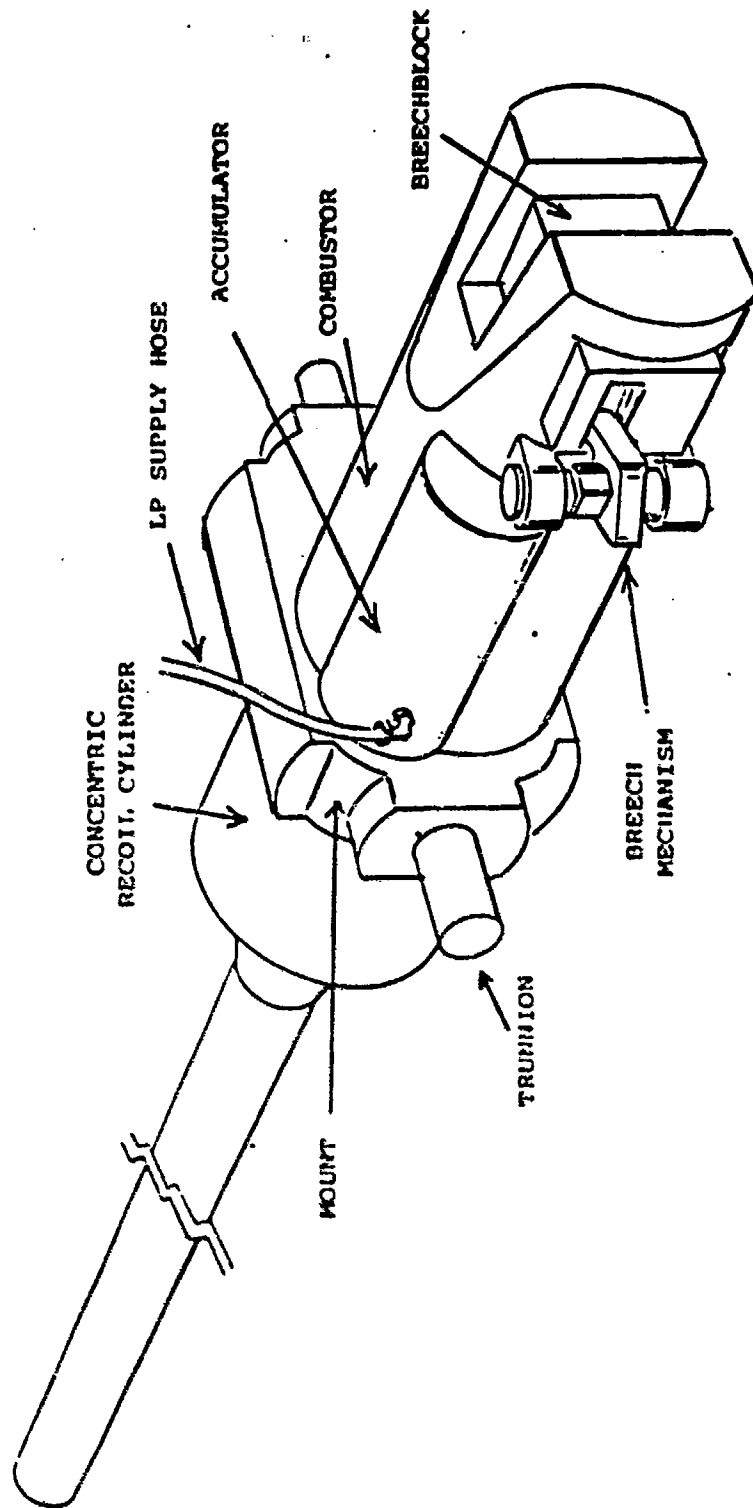


Figure 2. Reverse Annular Piston RLPG, External Configuration

## II. SIMULATION MODELS

In the overall simulation of a high performance tank gun firing a sabot kinetic energy (KE) penetrator, we use models which will allow us to:

- a. Determine the mass of a sabot capable of supporting a fin-stabilized KE penetrator in the gun bore and capable of withstanding the launch stresses.
- b. Estimate the interior ballistic performance of the gun when projectile, gun, and propellant parameters are varied.
- c. Estimate the external configuration and weight of the gun, recoil system, and loader in sufficient detail to conduct a vehicle integration study.

### 1. SABOT MODEL

The model used to estimate sabot weight was developed by Drysdale.<sup>3</sup> Given the geometry and weight of the penetrator, the physical properties (density, stress characteristics, etc) of the sabot, the maximum projectile base pressure, and the maximum projectile acceleration, the model estimates the sabot weight and thus the total in-bore weight of the projectile. The derivation of the algebraic equations used in the model and the assumptions made in the derivations are discussed in reference 3.

### 2. SP AND RLPG INTERIOR BALLISTIC MODELS

The first of the three interior ballistic models used in this study is the SP gun model, IBHVG2,<sup>4</sup> which is based on the earlier Baer-Frankle<sup>5</sup> model. The IBHVG2 model numerically integrates the ordinary differential equations describing the interior ballistic process of the SP gun. The model is widely used at the BRL and elsewhere to simulate the interior ballistic performance of a wide variety of guns.

The first RLPG model was developed by Coffee.<sup>6</sup> It is similar to the IBHVG2 model in that the physics of the RLPG are described by ordinary differential equations, which are then numerically integrated. The second model was developed by Gough.<sup>7</sup> Unlike the IBHVG2 and Coffee models; the Gough model integrates ordinary differential equations which describes piston motion and propellant injection and combustion, and one-dimensional partial differential equations which describe the flow of burning liquid droplets and gas in the barrel. Barrel pressure gradient in the IBHVG2 model was described by the Pidduck-Kent equations and in the Coffee model by modified Lagrange equations<sup>8</sup> which takes into account the velocity of the gas flow into the breech end of the barrel. All three models assume heat loss to the bore, and bore friction between projectile and the bore.

### III. GROUND RULES

#### 1. PROJECTILE DESIGN

In this study, we consider a broad range of projectile in-bore masses. Using the sabot model we compute a series of sabot masses and in-bore projectile masses making a conservative assumption that the maximum in-bore projectile base pressure and acceleration would correspond to the maximum chamber pressure of 500 MPa. This resulted in a set of in-bore projectile masses ranging from roughly 5 to 13 kg. For this study, only the total in-bore masses are important.

#### 2. RLPG GUN DESIGN

Pasko,<sup>9</sup> GEOSD, developed two conceptual RLPG designs for a 120-mm tank gun, see Figures 3 and 4. The primary constraint was that the cannon fit into the present space for the tank gun. The most efficient cannon envelope was obtained using a reverse annular piston (RAP) design, Figure 3.

In the RAP configuration, the piston is mounted around the gun barrel, and moves in the same direction as the projectile. As the piston moves, the propellant is injected from the liquid reservoir into the combustion chamber. The gas then flows into the gun barrel. It is also possible to inject propellant from the liquid reservoir directly into the gun barrel. The piston was designed to survive the stresses placed on it during acceleration and deceleration, and the piston mass was then calculated based on this design as 76.7 kg. The projectile travel is based on the maximum desired length of the gun tube. The projectile must be offset from the end of the combustion chamber to leave room for the fins. Table 1 shows the dimensions for the RAP gun.

TABLE 1. Reverse Annular Piston Gun Dimensions

	Volume	Cross-Sectional
	liters	Area cm <sup>2</sup>
Liquid Reservoir:	11.7	547.1
Intermediate Chamber:	3.19	743.9
Combustion Chamber:	4.92	452.4
Piston Orifice:		53.6


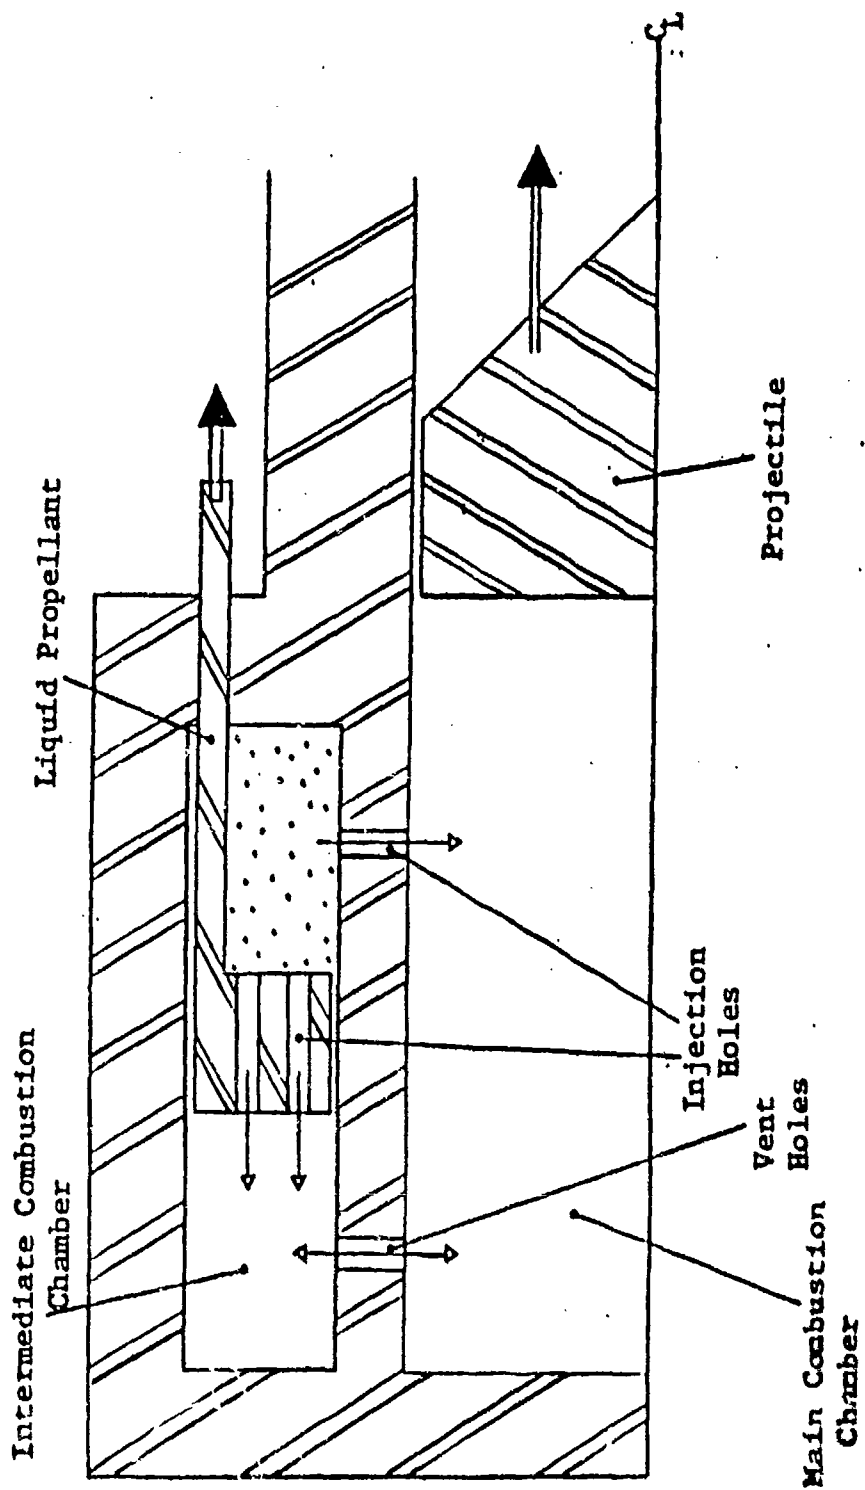


Figure 3. Reverse Annular Piston RLPG, Internal Configuration

**BEFORE FIRING**

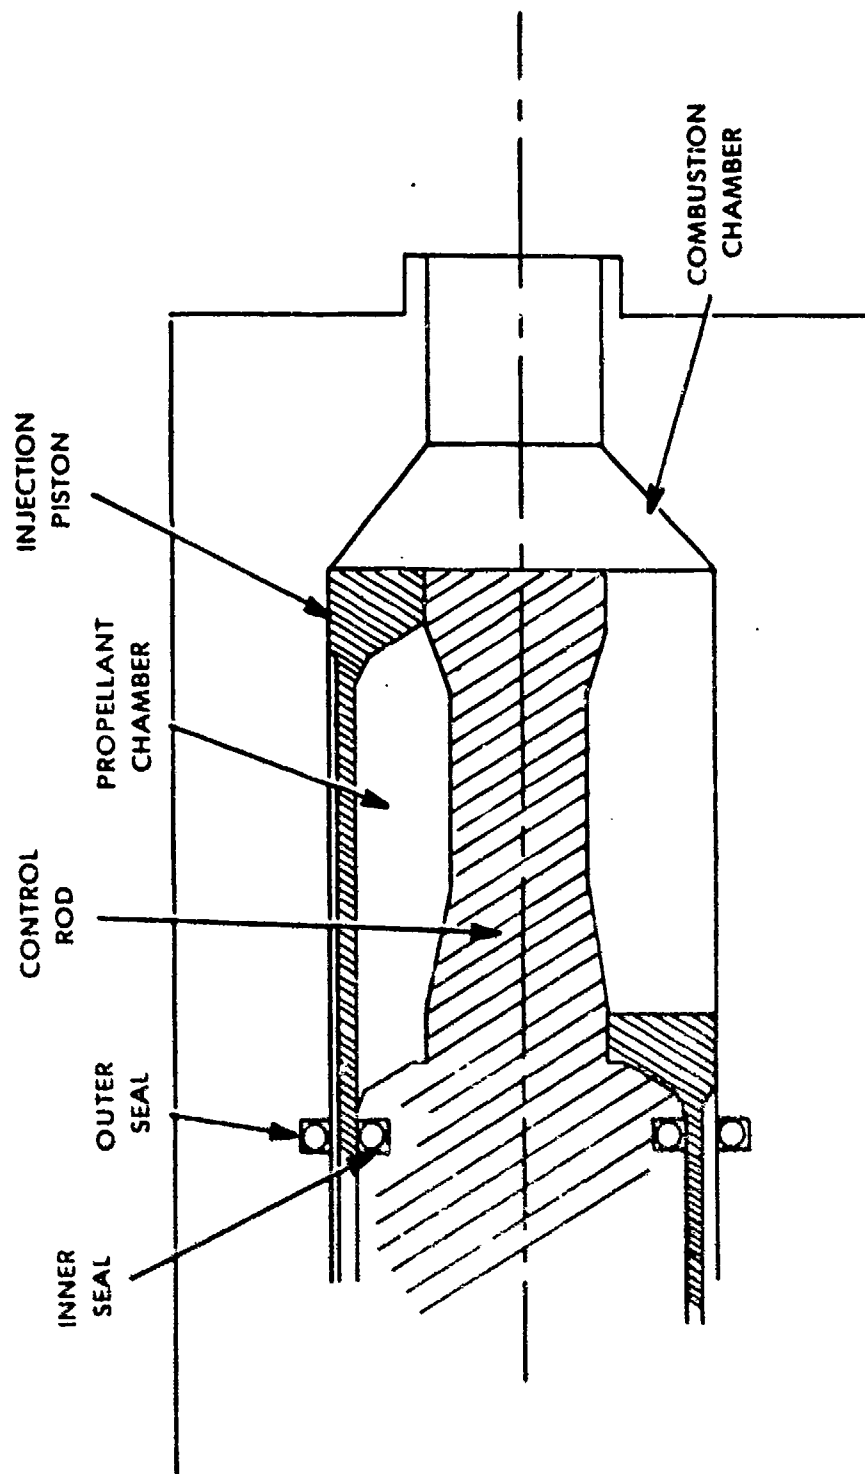

**AFTER FIRING**

Figure 4. In-Line Annular Piston RLPC, Internal Configuration

To model this configuration, we need to choose not only the size of the vent in the piston, but also the size of the vents between the intermediate and combustion chamber and between the liquid reservoir and the gun tube. The vent into the gun tube normally opens during the firing. We moreover must choose when and how rapidly this vent opens. The gun performance depends strongly on the choice of the various vent sizes. At the moment we do not have enough experience to choose these vent sizes intelligently. So for simplicity, the in-line annular piston (IAP) configuration was utilized for this study.

The dimensions of the liquid propellant injector are chosen to preserve the hydraulic difference of 1.4 between the liquid reservoir and the combustion chamber. The IAP configuration consists of a central bolt surrounded by the piston. Normally, the bolt is tapered, such that the liquid reservoir is initially closed. As the piston moves, the vent area gradually increases. The bolt has a long straight section, where the vent area is constant. Finally, the piston must be decelerated, either by tapering the bolt to compress the liquid propellant or by a buffer acting on the piston shaft. For this level of approximation, we do not consider the optimum design for the bolt taper. Instead, we use a constant radius bolt, and the vent area is then fixed for the entire piston motion. The piston dimensions are also kept constant. The vent area is changed by varying the size of the central bolt. Dimensions are given in Table 2.

TABLE 2. In Line Piston Gun Dimensions

	Volume	Cross-Sectional
	liters	Area cm <sup>2</sup>
Liquid Reservoir:	11.7	719.6
Combustion Chamber:	8.11	916.3
Piston Orifice:		226.0

For the comparative purposes of this study, we assume a hypothetical liquid propellant, more energetic than those presently used. This pseudo propellant, called liquid JA2, has the thermochemical properties of the solid propellant JA2, and the physical properties of the liquid propellant LCP1846. This also makes it convenient to compare our results with a solid propellant gun model. The properties of all the propellants considered in this study are given in Table 3.

TABLE 3. Propellant Properties

Propellant Type:	SP-JA2	LGP-JA2	LGP-1845*	LGP-1846*
Density (g/cc):	1.578	1.430	1.461	1.430
Bulk modulus (MPa):	-----	5103.5	5103.5	5103.5
Bulk modulus derivative:	-----	8.2173	8.2173	8.2173
Chemical energy (j/g):	5067	5067	4556	4293
Specific heat ratio:	1.225	1.225	1.214	1.219
Molecular weight (g/mole):	24.865	24.865	23.074	22.849
Covolume (cc/g):	0.996	0.996	0.720	0.693

The projectile properties are given in Table 4. The projectile mass was varied over the range of interest, as indicated above. For the sake of simplification, the original offset of the projectile is taken to be zero. Hence the initial volume of the system is just the sum of the liquid reservoir and combustion chamber volumes. Empirical models for the air shock in front of the projectile and the heat loss to the gun tube are included. The heat loss model is adjusted such that approximately 5% of the energy in the system is lost to the tube walls, comparable to standard assumptions in solid propellant simulations.

TABLE 4. Projectile Properties

Offset:	0.0 cm
Travel:	629.9 cm
Gun Tube Diameter:	12.0 cm
Shot Start Pressure:	34.0 MPa
Fictional Resistance:	5.5 MPa

Additional assumptions were required in order to conduct the computer simulations. The flow into the combustion chamber is governed by a steady

---

\*Obsolete Data. Current data may be obtained by a request to the authors.



state Bernoulli equation. The losses in this process are lumped into the discharge coefficient, which is given a typical value of 0.75. There should be some liquid accumulation in the combustion chamber, especially early in the gun cycle when pressures are low. But a reasonable approximation<sup>5</sup> is to assume that the liquid combusts instantaneously as it enters the combustion chamber. The gas flow into the gun tube is assumed to be isentropic with a discharge coefficient of one. The pressure in the gun tube is assumed to follow a Lagrange pressure distribution which has been modified to take into account the non-zero fluid velocity into the throat of the gun tube. The liquid in the reservoir is normally pre-pressurized to 7.0 MPa in order to reduce the effects of gas bubbles. Finally, the burning of the primer is not modeled in detail. Rather, it is assumed that the primer has burned completely at the start of the simulation, leading to an initial pressure in the combustion chamber of 15.0 MPa.

The maximum pressure allowed in the reservoir is 700 MPa. In this study, we are seeking the best performance possible with the desired pressure limits. So the vent area is adjusted until the maximum liquid pressure reaches 700 MPa. As a result of the hydraulic difference chosen, this will usually guarantee that the gas pressure does not exceed 500 MPa.

### 3. INTERIOR BALLISTIC SIMULATIONS - 120-mm GUN

Preliminary calculations were conducted using both the Gough and the Coffee models. The predicted muzzle velocities agreed to within a fraction of a percent. Since the Coffee code runs more rapidly, it was used for the majority of the calculations in this study.

The total initial volume of the gun is the sum of the liquid reservoir and combustion chamber volumes. This volume can be varied to some degree and still fit into the designated space. It is important in optimizing system performance to choose reasonably good values for these volumes.

The initial liquid reservoir volume was chosen to match propellant charge weight (16.7 kg). To determine the effect of loading density on performance, the charge was fixed and the combustion chamber volume was varied.

To cover the extreme cases, the lightest and the heaviest projectile masses were considered. The chamber volume was then varied between 2 and 10 liters. In each case, the vent area was adjusted such that the maximum liquid pressure obtained was 700 MPa. Results are given in Figures 5 and 6 in terms of loading density (charge/initial volume).

For the light projectile, the muzzle velocity is quite high. The vent area is chosen to be fairly large, since the projectile accelerates rapidly, opening up a larger area in the gun tube. The best performance occurs for a low chamber volume, which corresponds to a loading density of about 1.1 g/cc. For the heavy projectile, the vent area must be kept smaller, since the projectile moves more slowly, and the best performance occurs for a larger chamber volume corresponding to a loading density of about 0.85 g/cc. Based

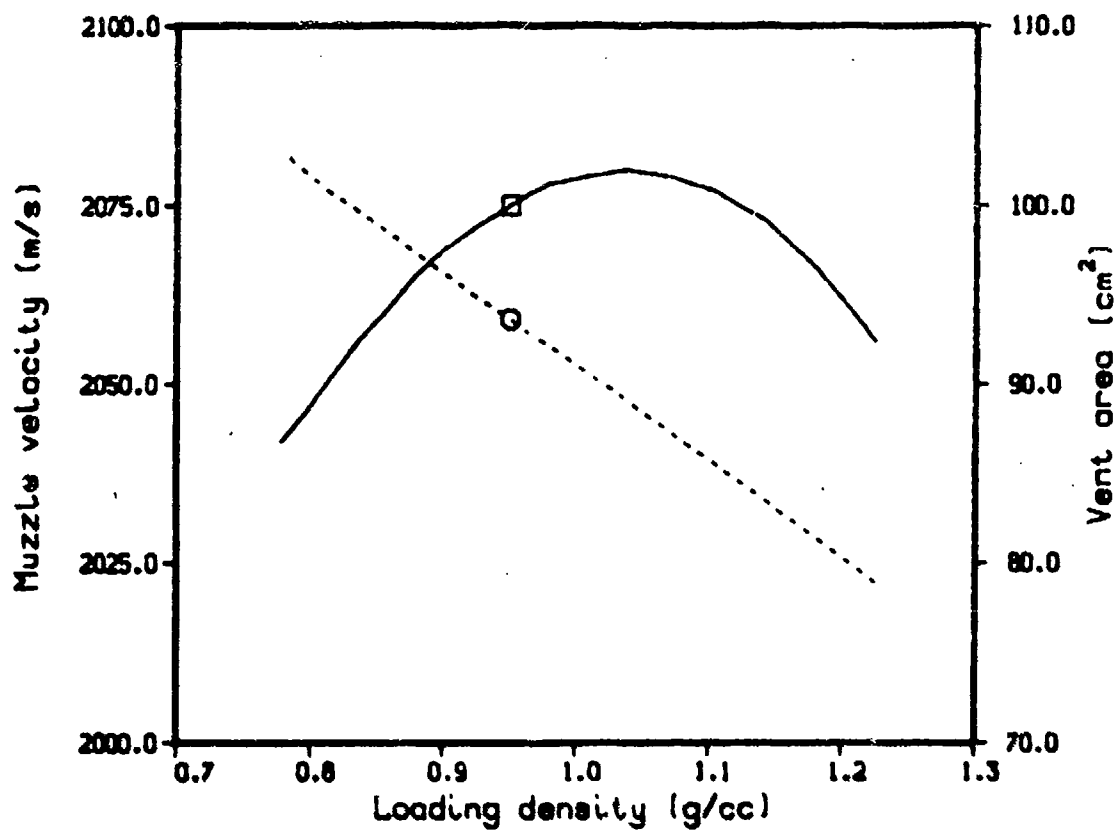


Figure 5. Muzzle Velocity vs Loading Density for the RLPG  
Using the Lightest Projectile, 120-mm Gun.

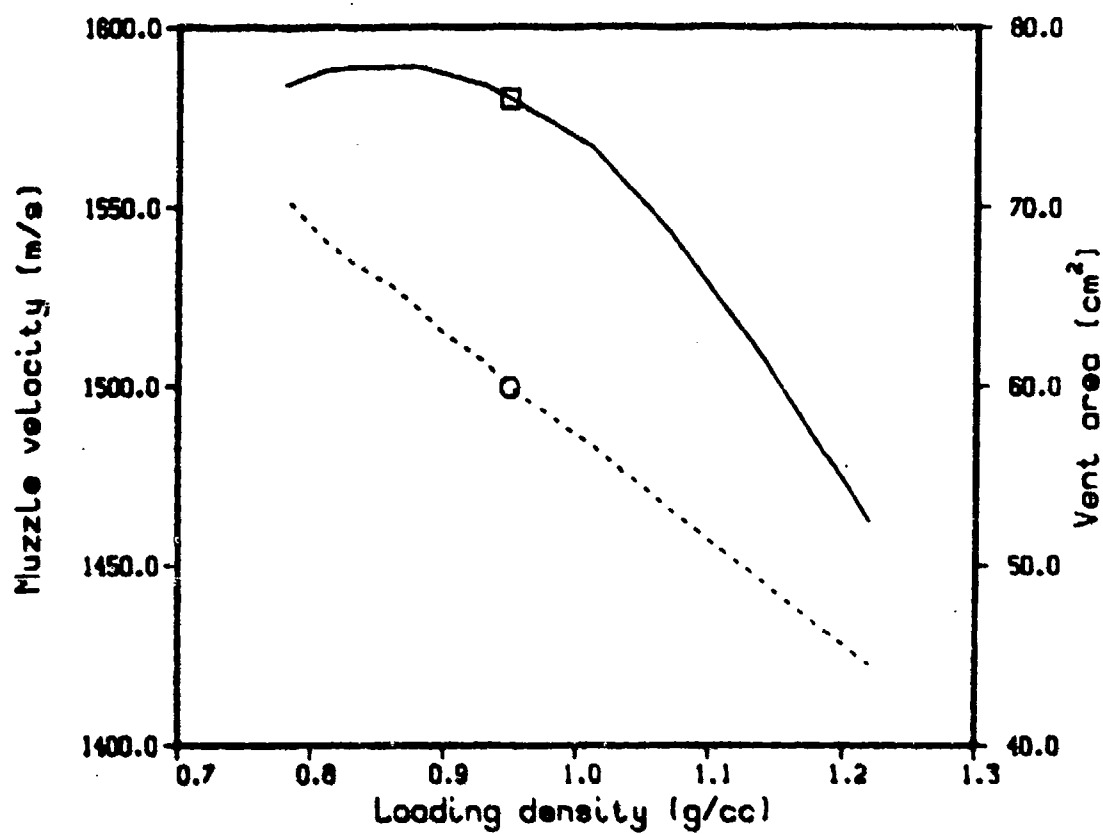


Figure 6. Muzzle Velocity vs Loading Density for the RLPG  
Using the Heaviest Projectile, 120-mm Gun.

on these results, an initial chamber volume of 6 liters was chosen. This is close to the best possible performance for both projectiles.

To determine the effect of varying the charge, the liquid reservoir volume was varied with the chamber volume kept constant at 6 liters. This changes the ratio of the propellant charge to the projectile mass (C/M). Figures 7 and 8 show the results for the lightest and heaviest projectiles respectively. The symbols mark the default values of propellant charge used above. For the light projectile, the charge to mass ratio is just about optimum. For the heavy projectile, a slight increase in performance is possible by increasing the charge mass. We chose to fix the propellant charge at 16.7 kg.

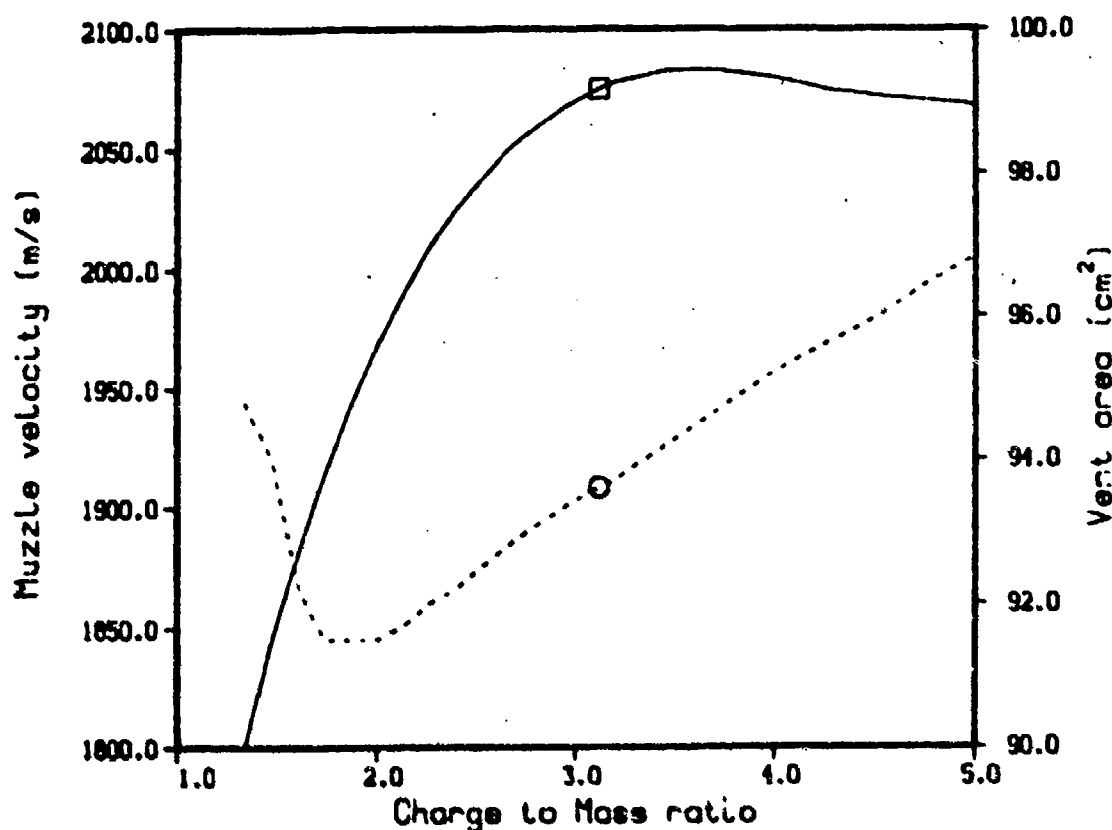


Figure 7. Muzzle Velocity vs Charge to Mass Ratio for the RLPG Using the Lightest Projectile, 120-mm Gun.

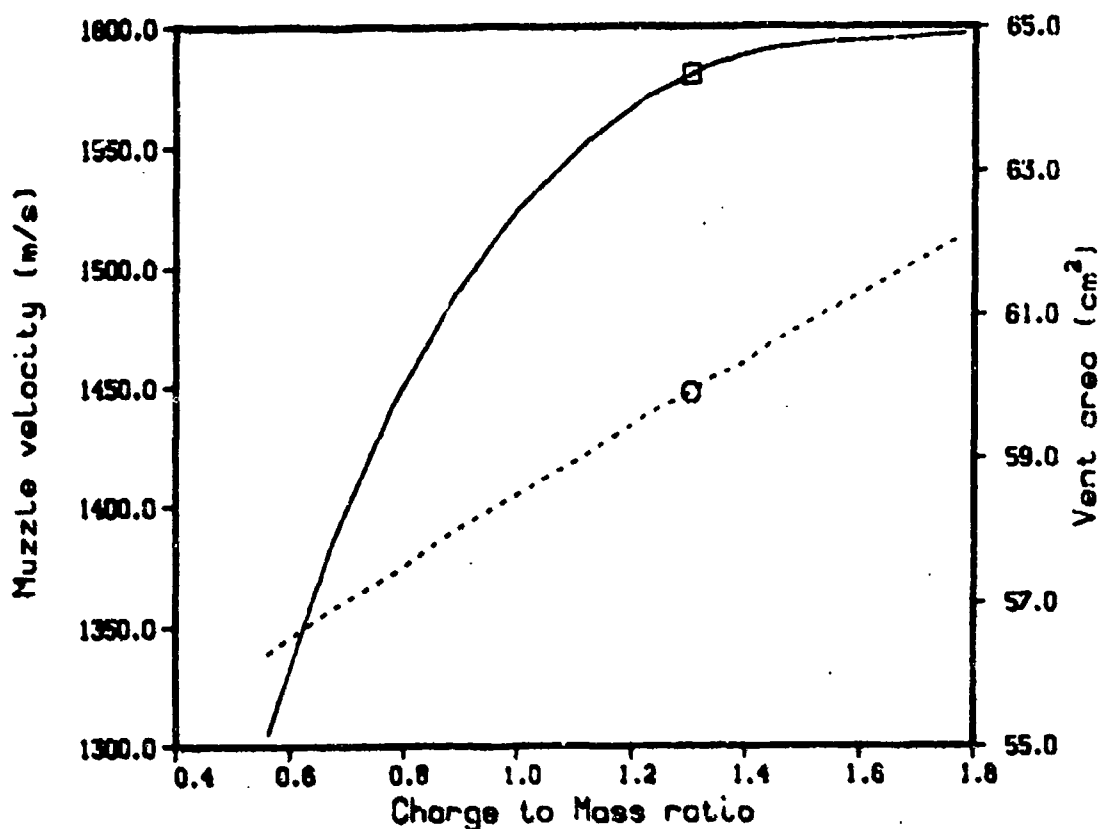


Figure 8. Muzzle Velocity vs Charge to Mass Ratio for the RLPG Using the Heaviest Projectile, 120-mm Gun.

Figure 7 shows unusual behavior in the vent area. For the smallest charge, the fuel burns out just as the pressure limit of 700 MPa is reached. As the charge increases, the vent area must decrease. A slightly slower injection rate allows the liquid pressure to remain under 700 MPa for the longer injection stroke. Eventually, we reach the point where the length of the liquid column becomes important. For a larger liquid reservoir, it takes longer to compress the liquid, which delays the injection. At a charge to mass ratio of about 1.9 we reach the transition point, and the vent must be chosen larger to keep up the injection rate. Finally, for very large charges, the long liquid column length actually decreases the performance.

Using the above optimum values for liquid and combustion chamber volumes (liquid volume= 11.7 liters, liquid weight = 16.7 kg, and chamber volume= 6 liters), the muzzle velocity was then computed over the range of projectile weights (Figure 9). For comparison, the velocities predicted using two actual

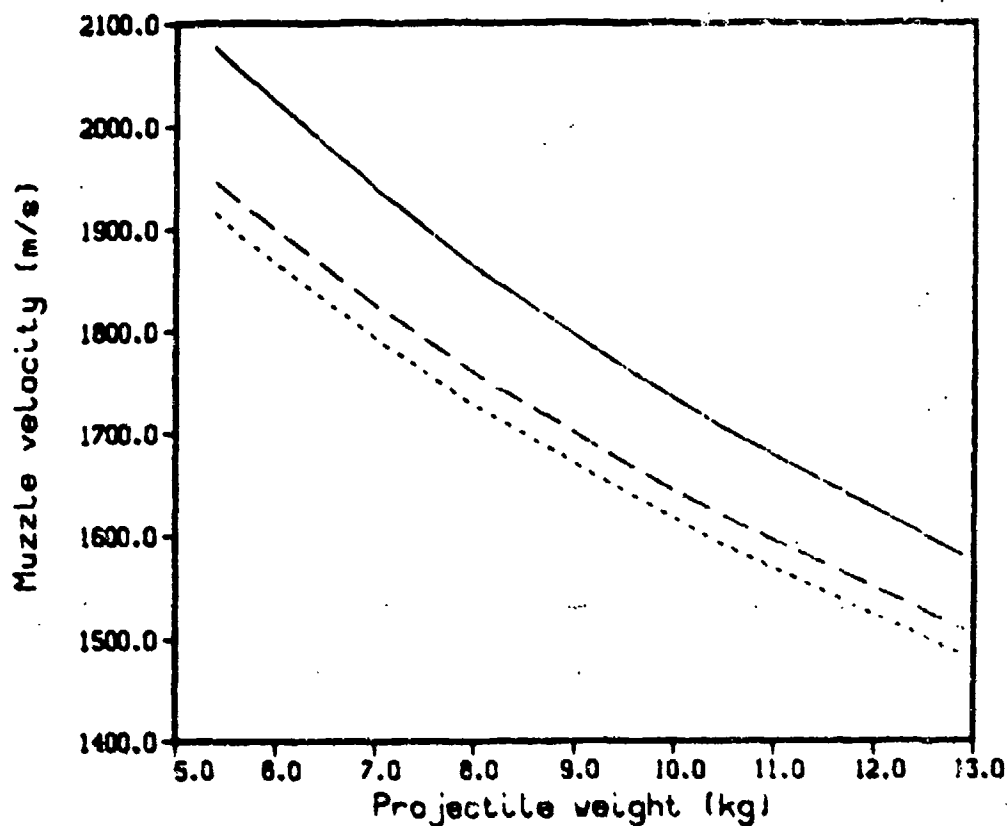


Figure 9. Muzzle Velocity vs Projectile Weight for Liquid JA2 (line), HAN1845 (dot), and HAN1846 (dash), 120-mm Gun.

HAN propellants are also given. Assuming a more energetic propellant increases the performance by about 100 m/s.

Calculations were also done for the SP gun, using the IBHVG2 model. In each case, the propellant web was varied in order to obtain a maximum pressure of 500 MPa. The same loading density (0.95) as for the RLPG was used. The muzzle velocities were similar to the RLPG model using the HAN propellants (Figure 10).

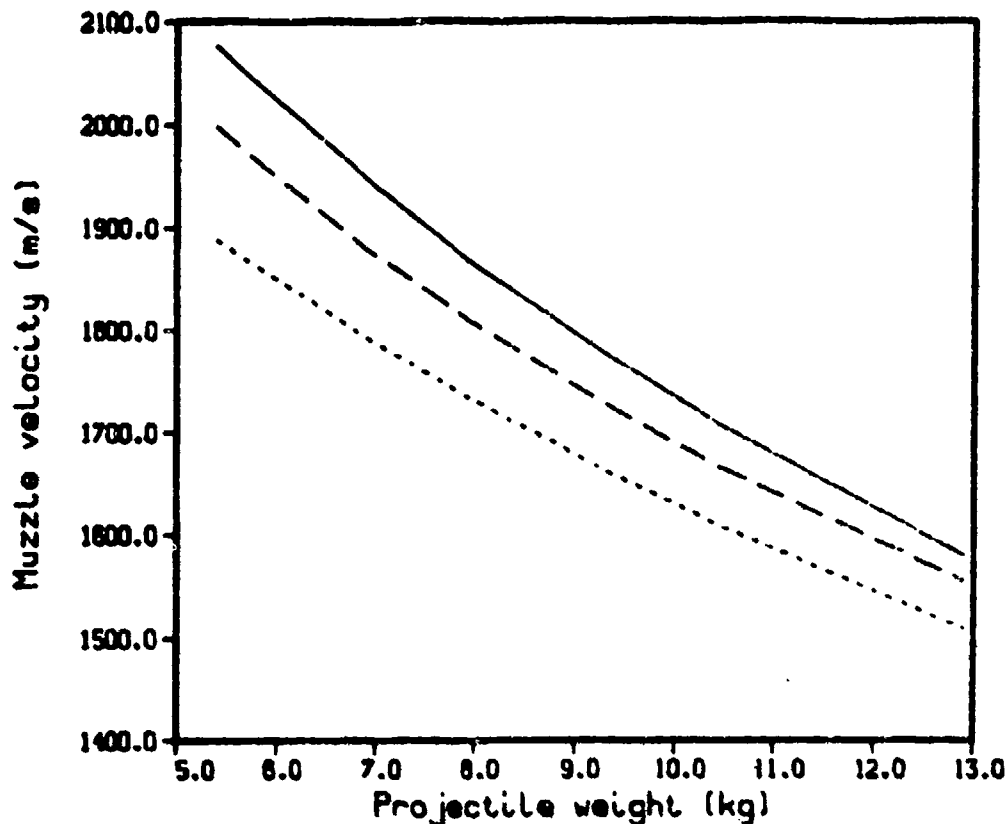


Figure 10. Muzzle Velocity vs Projectile Weight for Liquid JA2 (line), and Solid Propellant at Two Loading Densities [0.75 g/cc (dot) and 0.95 g/cc (dash)], 120-mm Gun.

The SP predictions using JA2 propellant were expected to be comparable with those of the RLPG with liquid JA2. Instead, the muzzle velocities were substantially lower. This can be explained by comparing muzzle velocity versus loading density curves for both the SP and RLPG models (Figure 11). The standard projectile weight of 7.12 kg was used, and two different charge weights were considered, 8.1 kg and 16.7 kg.

In each case, the SP performance drops off sharply with increasing loading density. The RLPG has an advantage in this regime, since the liquid can be injected and hence burned gradually, while the entire SP charge is exposed to the combustion chamber conditions. The SP web must be increased in order to stay within the maximum pressure limit, but combustion is then less efficient, and burnout does not occur prior to projectile exit. For this reason, the RLPG is relatively more efficient for a larger charge.

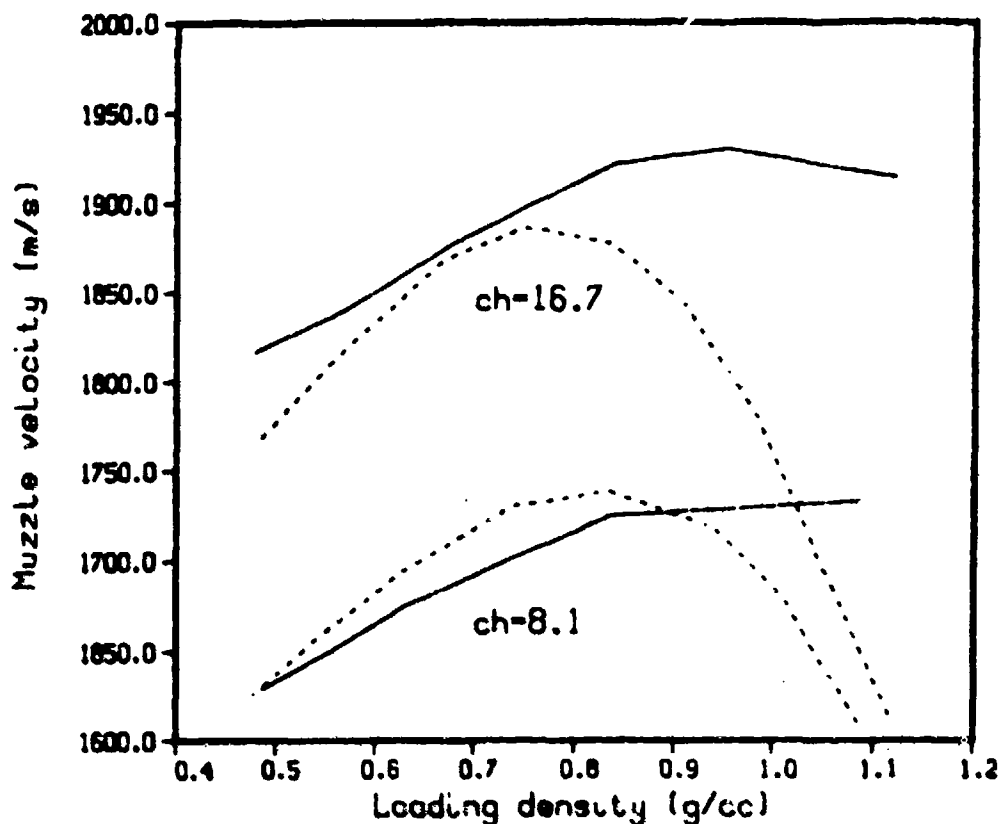


Figure 11. Muzzle Velocity vs Loading Density for Liquid JA2 (line) and Solid Propellant (dot). Cases with a 7.12 kg Projectile, 120-mm Gun.

The optimum loading density for the SP from Figure 11 is around 0.75. Therefore, a series of calculations using this loading density (Figure 10) were also done. Note that decreasing the loading density requires that the chamber volume be increased by about 5 liters. The SP velocities are closer to, though still below those of the RLPG with liquid JA2.

#### 4. INTERIOR BALLISTIC SIMULATIONS - 140-mm GUN

We would also like to know if improved performance is possible by replacing the 120-mm gun with a 140-mm gun. As in the 120-mm study we choose to use an in-line liquid propellant injector for this gun. As a first approximation, we used the same reservoir and chamber dimensions as for the 120-mm gun, and just attached a larger gun tube.



The same set of penetrators were used. Because of the larger gun tube, the sabot weight must be increased. Thus the total in-bore projectile weights are heavier ranging from about 6 kg to 15 kg.

As before, we did a preliminary set of runs varying the chamber volume (Figures 12 and 13). For the light projectile, the best performance is obtained when the combustion chamber is as small as possible (high loading density). Since the gun tube is larger, a larger volume is opened up as the light projectile is accelerated. Thus the maximum chamber pressure is less likely to exceed the desired limit.

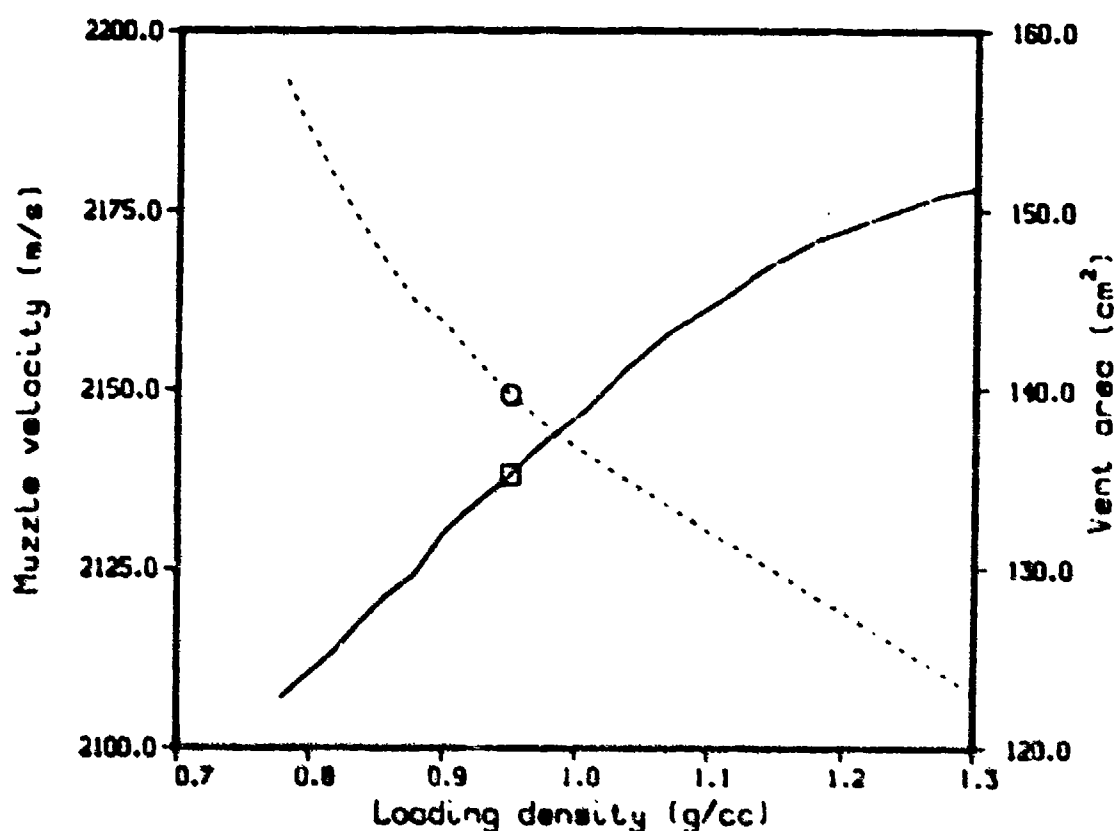


Figure 12. Muzzle Velocity vs Loading Density for the RLPG  
Using the Lightest Projectile, 140-mm Gun.

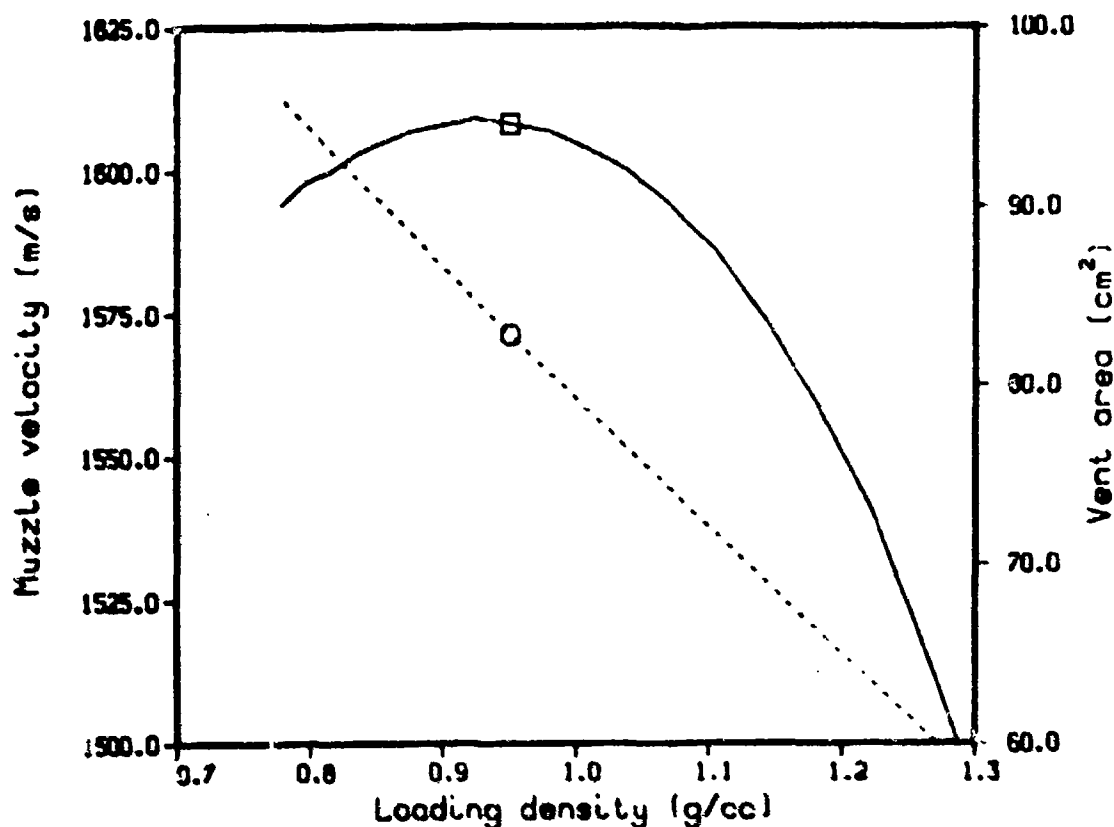


Figure 13. Muzzle Velocity vs Loading Density for the RLEG  
Using the Heaviest Projectile, 140-mm Gun.

For the heavy projectile, a larger chamber volume is better, since the projectile does not accelerate as rapidly. If the chamber volume is too small, the vent area must be made very small to prevent over-pressurization.

There is no longer a good compromise value for the initial chamber volume. For the sake of consistency, we use the same value as used for the 120-mm study (6.0 liters).

We also varied with charge weight, with the initial chamber volume fixed at 6.0 liters. The results are shown in Figures 14 and 15. In this case, better performance for both the light and the heavy projectile can be obtained by increasing the initial charge. This would of course result in a larger gun. For the purposes of comparison with the 120-mm cases, we keep the same initial reservoir volume of 11.7 liters.

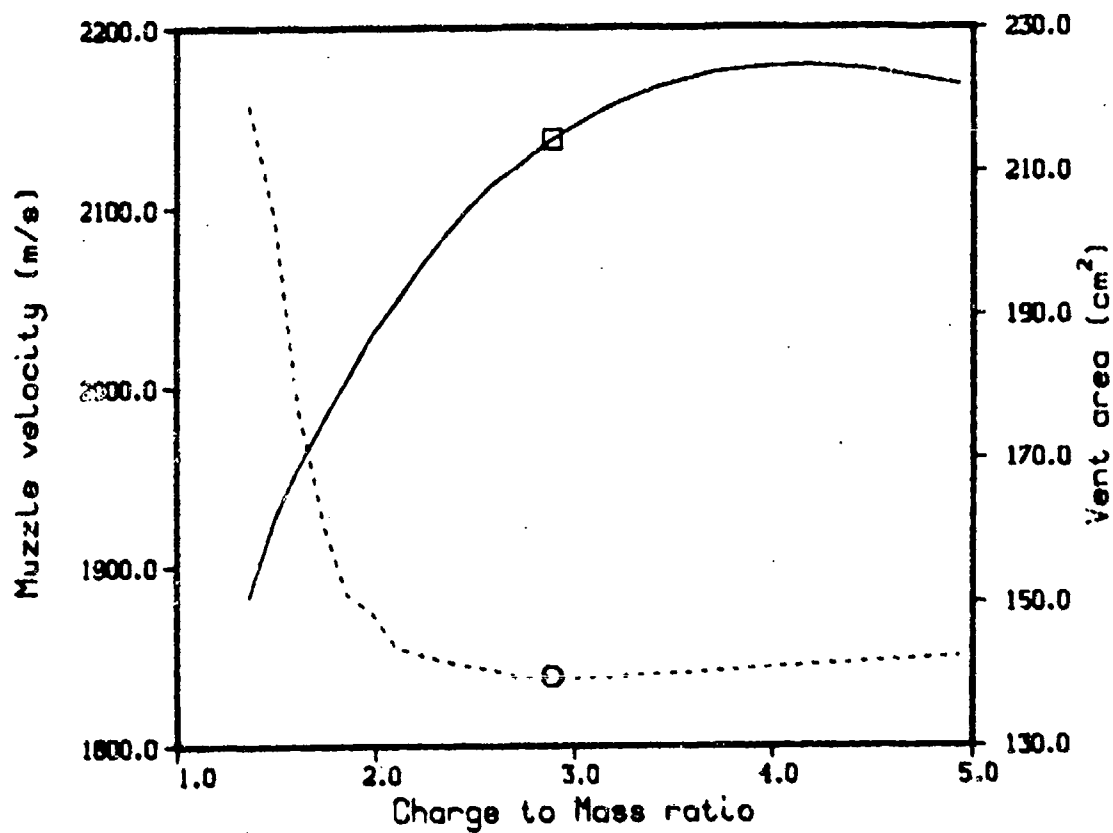


Figure 14. Muzzle Velocity vs Charge to Mass Ratio for the RLPG Using the Lightest Projectile, 140-mm Gun.

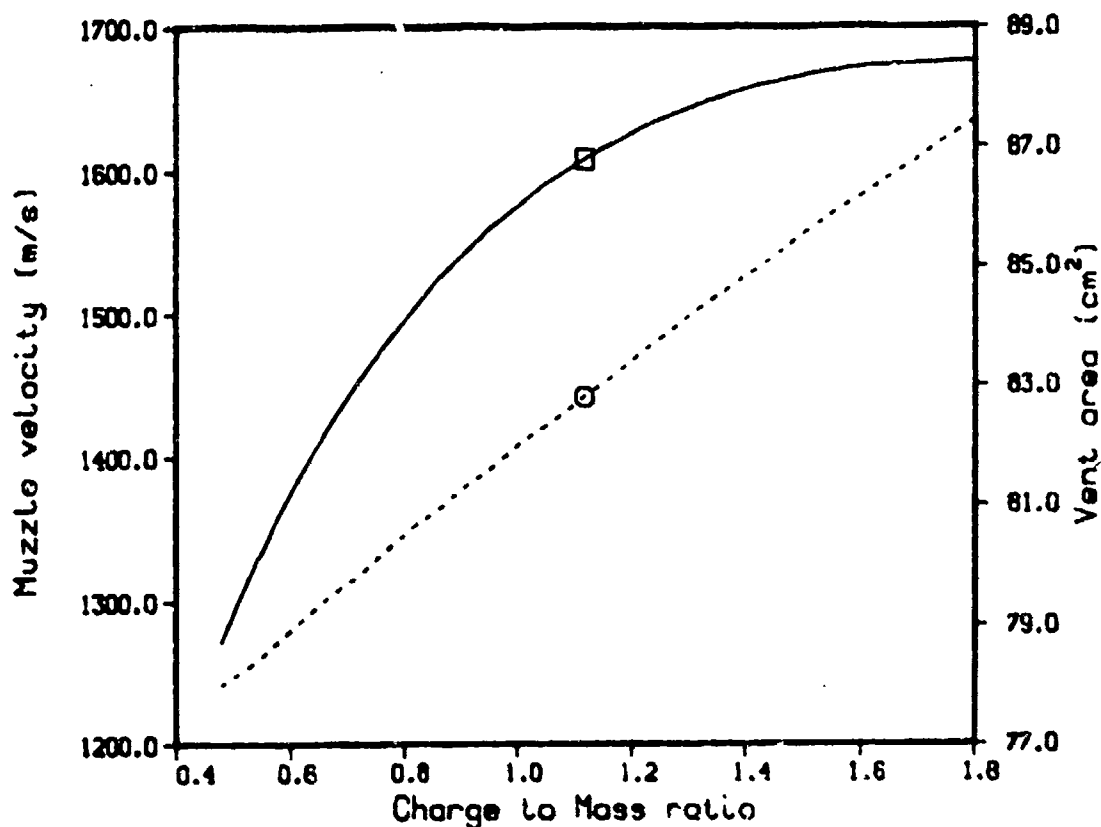


Figure 15. Muzzle Velocity vs Charge to Mass Ratio for the RLPG Using the Heaviest Projectile, 140-mm Gun.

The results for our series of projectile weights are given in Figure 16. The curve is similar to the 120-mm curve (also shown). The muzzle velocities average about 2.5% larger. So a slight increase in performance can be obtained by using the larger 140-mm gun. This can be increased further if it is possible to increase the charge weight.

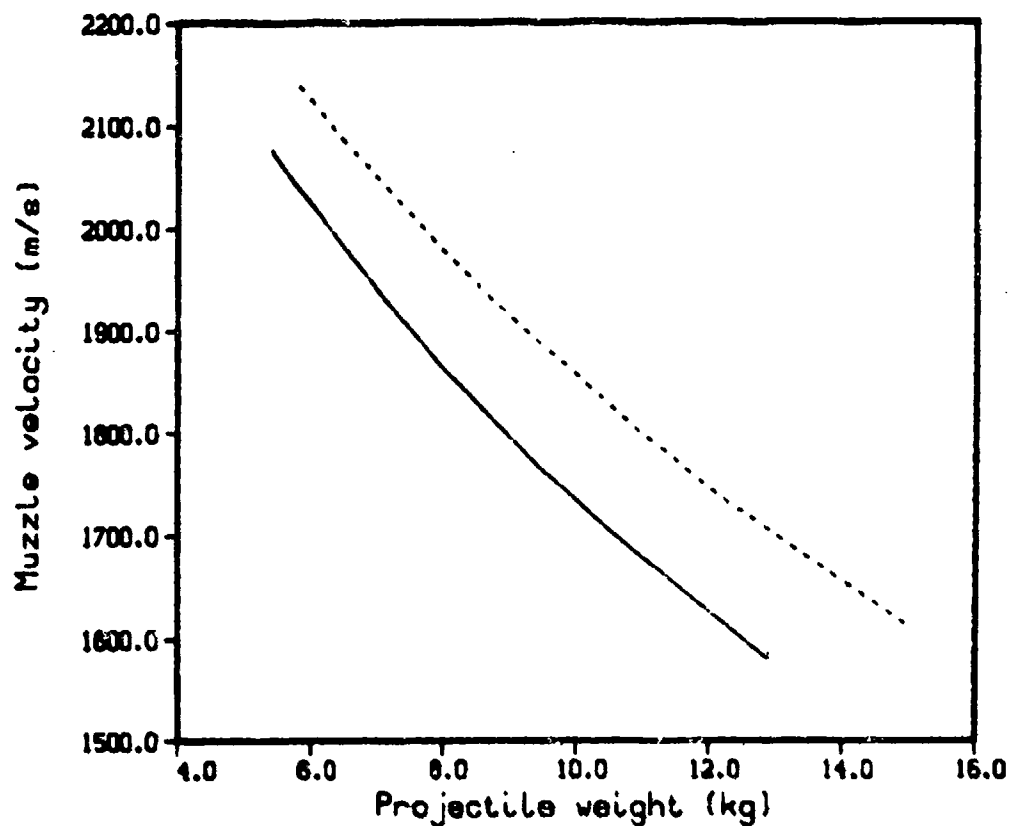


Figure 16. Muzzle Velocity vs Projectile Weight for Liquid JA2. 120-mm Gun (line). 140-mm Gun (dot).

#### IV. DISCUSSION AND CONCLUSIONS

Simulations were carried out using a SP gun model and two RLP gun models. The RLP gun models using "liquid JA2" predicted muzzle velocities slightly higher than the SP gun model with JA2. If actual liquid propellants LGP1845 or LGP1846 are used instead, the performance is lowered by 5% to 10%. These results highlight the need for higher energy liquid propellants.

For the RLP gun models, a simple cylindrical center rod in the LP injector was used. Additional increases in performance can be obtained by using a tapered rod or other means to tailor the propellant injection and thus pressure time curve. Also, a buffer to slow down the piston at the end of its stroke will result in lower liquid pressures, allowing the vent area to be chosen larger, further increasing the performance.

The RLP and SP gun models show some interesting differences. In particular, the optimum loading density for a SP gun is sharply peaked. Increasing propellant charge forces a web increase so as to stay within the pressure limits, causing a performance decrease. The RLP gun instead shows a broad maximum for performance versus loading density. The fact that the propellant is injected gradually makes the choice of the charge weight less critical.

Based on these computer simulations, it appears that the RLP gun is capable of providing performance equivalent to that of high performance solid propellant guns. The advantages of the LP are realized at the system level in the tank, particularly for the very high C/M, high gun velocities.

The advantages of the RLP gun system include: increased ammunition stowage (56 rounds instead of the current 40 in the M1A1) while doubling the C/M thus increasing gun performance; simplification of autoloader design since only the projectile is handled mechanically; and reduced system vulnerability due both to the low vulnerability characteristics of the HAN-based LPs and the ability to stow the propellant external to the crew compartment.

## REFERENCES

1. VanDerwerken, J.M., "High Performance Regenerative Liquid Propellant Gun Study," BRL-CR-550, February 1986.
2. Baer, P.G., May, I.W., and Morrison, W.F., "Comparison of Predicted Muzzle Flash for Solid and Regenerative Liquid Propellant Guns," Proc. 14th JANNAF Plume Technology Mtg., China Lake CA, 1983.
3. Drysdale, W.H., "Design of Kinetic Energy Projectiles for Structural Integrity," Ballistic Research Laboratory Technical Report ARBRL-TR-02365, 1981.
4. Anderson, R.D. and Fickie, K.D., "IBHVG2 - A User's Guide," Ballistic Research Laboratory Technical Report No. 2829, in print.
5. Baer, P.G. and Frankle, J.M., "The Simulation of Interior Ballistic Performance of Guns by Digital Computer Program," Ballistic Research Laboratory Technical Report No. 1183, 1961.
6. Coffee, T.P., "A Lumped Parameter Code for Regenerative Liquid Propellant Guns," Ballistic Research Laboratory Technical Report BRL-TR-2703, 1985.
7. Gough, P.S., "A Model of the Interior Ballistics of Hybrid Liquid Propellant Guns," Ballistic Research Laboratory Contract Report, CR-566, 1987.
8. Morrison, W.F., Bulman, M.J., Baer, P.G., and Banz, C.F., "The Interior Ballistics of Regenerative Liquid Propellant Guns," Proceedings of the 1984 JANNAF Propulsion Meeting.
9. Pasko, W., General Electric Ordinance System Division, private communication.

# DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
12	Commander Defense Technical Info Center ATTN: DTIC-DDA Cameron Station Alexandria, VA 22304-6145	3	Director Benet Weapons Laboratory Armament R&D Center US Army AMCCOM ATTN: SMCAR-LCB-TL E. Conroy A. Graham Watervliet, NY 12189
1	Director Defense Advanced Research Projects Agency ATTN: H. Fair 1400 Wilson Boulevard Arlington, VA 22209	1	Commander US Army Armament, Munitions and Chemical Command ATTN: SMCAR-ESP-L Rock Island, IL 61299-7300
1	HQDA DAMA-ART-M Washington, DC 20310	1	Commander US Army Aviation Research and Development Command ATTN: AMSAV-E 4300 Goodfellow Blvd. St. Louis, MO 63120
1	Commander US Army Materiel Command ATTN: AMCDRA-ST 5001 Eisenhower Avenue Alexandria, VA 22333-0001	1	Commander Materials Technology Lab US Army Laboratory Cmd ATTN: SLCMT-MCM-SB M. Levy Watertown, MA 02172-0001
13	Commander Armament R&D Center US Army AMCCOM ATTN: SMCAR-TSS SMCAR-TDC SMCAR-SCA, B. Brodman R. Yalamanchili SMCAR-AEE-B, D. Downs A. Beardell SMCAR-LCE, N. Slagg SMCAR-AEE-B, W. Quine A. Bracuti J. Lannon SMCAR-CCH, R. Price SMCAR-FSS-A, L. Frauen SMCAR-FSA-S, H. Liberman Picatinny Arsenal, NJ 07806-5000	1	Director US Army Air Mobility Rsch. and Development Lab. Ames Research Center Moffett Field, CA 94035
		1	Commander US Army Communications Electronics Command ATTN: AMSEL-ED Fort Monmouth, NJ 07703
		1	Commander ERADCOM Technical Library ATTN: STET-L Ft. Monmouth, NJ 07703-5301



# DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
1	Commander US Army Harry Diamond Labs ATTN: SLCHD-TA-L 2800 Powder Mill Rd Adelphi, MD 20783	1	Commander Armament Rsch & Dev Ctr US Army Armament, Munitions and Chemical Command ATTN: SMCAR-CCS-C, T Hung Picatinny Arsenal, NJ 07806-5000
1	Commander US Army Missile Command Rsch, Dev, & Engr Ctr ATTN: AMSMI-RD Redstone Arsenal, AL 35898	1	Commandant US Army Field Artillery School ATTN: ATSF-CMW Ft Sill, OK 73503
1	Commander US Army Missile & Space Intelligence Center ATTN: AIAMS-YDL Redstone Arsenal, AL 35898-5500	1	Commandant US Army Armor Center ATTN: ATSB-CD-MLD Ft Knox, KY 40121
1	Commander US Army Belvoir R&D Ctr ATTN: STRBE-WC Tech Library (Vault) B-315 Fort Belvoir, VA 22060-5606	1	Commander US Army Development and Employment Agency ATTN: MODE-TED-SAB Fort Lewis, WA 98433
1	Commander US Army Tank Automotive Cmd ATTN: AMSTA-TSL Warren, MI 48397-5000	1	Commander Naval Surface Weapons Center ATTN: D.A. Wilson, Code G31 Dahlgren, VA 22448-5000
1	Commander US Army Research Office ATTN: Tech Library P.O. Box 12211 Research Triangle Park, NC 27709-2211	1	Commander Naval Surface Weapons Center ATTN: Code G33, J. East Dahlgren, VA 22448-5000
1	Director US Army TRADOC Systems Analysis Activity ATTN: ATAA-SL White Sands Missile Range NM 88002	2	Commander US Naval Surface Weapons Ctr. ATTN: O. Dengel K. Thorsted Silver Spring, MD 20902-5000
1	Commandant US Army Infantry School ATTN: ATSH-CD-CSO-OR Fort Benning, GA 31905	1	Commander Naval Weapons Center China Lake, CA 93555-6001
		1	Commander Naval Ordnance Station ATTN: C. Dale Code 5251 Indian Head, MD 20640

# DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
1	Superintendent Naval Postgraduate School Dept of Mechanical Eng. ATTN: Code 1424, Library Monterey, CA 93943	10	Central Intelligence Agency Office of Central Reference Dissemination Branch Room GE-47 HQS Washington, DC 20502
1	AFWL/SUL Kirtland AFB, NW 87117	1	Central Intelligence Agency ATTN: Joseph E. Backofen HQ Room 5F22 Washington, DC 20505
1	Air Force Armament Lab ATTN: AFATL/DLODL Eglin, AFB, FL 32542-5000	3	Bell Aerospace Textron ATTN: F. Boorady F. Picirillo A.J. Friona Post Office Box One Buffalo, NY 14240
1	AFOSR/NA (L. Caveny) Bldg. 410 Bolling AFB, DC 20332	1	Calspan Corporation ATTN: Tech Library P.O. Box 400 Buffalo, NY 14225
1	Commandant USAFAS ATTN: ATSF-TSM-CN Ft Sill, OK 73503-5600	7	General Electric Ord. Sys Dpt ATTN: J. Mandzy, OP43-220 R.E. Mayer H. West M. Bulman R. Pate I. Magoon J. Scudiere 100 Plastics Avenue Pittsfield, MA 01201-3698
1	US Bureau of Mines ATTN: R.A. Watson 4800 Forbes Street Pittsburgh, PA 15213	1	General Electric Company Armanent Systems Department ATTN: D. Maher Burlington, VT 05401
1	Director Jet Propulsion Lab ATTN: Tech Libr 4800 Oak Grove Drive Pasadena, CA 91109	1	IITRI ATTN: Library 10 W. 35th St. Chicago, IL 60616
2	Director National Aeronautics and Space Administration ATTN: MS-603, Tech Lib MS-86, Dr. Povinelli 21000 Brookpark Road Lewis Research Center Cleveland, OH 44135	1	Olin Chemicals Research ATTN: David Gavin P.O. Box 586 Cheshire, CT 06410-0586
1	Director National Aeronautics and Space Administration Manned Spacecraft Center Houston, TX 77058		

# DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
2	Olin Corporation ATTN: Victor A. Corso Dr. Ronald L. Dotson P.O. Box 30-9644 New Haven, CT 06536	2	University of Delaware Department of Chemistry ATTN: Mr. James Cronin Professor Thomas Brill Newark, DE 19711
1	Paul Gough Associates ATTN: Paul Gough PO Box 1614 Portsmouth, NH 03801	1	U. of ILLinois at Chicago ATTN: Professor Sohail Murad Dept of Chemical Eng Box 4348 Chicago, IL 60680
1	Safety Consulting Engr ATTN: Mr. C. James Dahn 5240 Pearl St. Rosemont, IL 60018	1	U. of Maryland at College Park ATTN: Professor Franz Kasler Department of Chemistry College Park, MD 20742
1	Science Applications, Inc. ATTN: R. Edelman 23146 Cumorah Crest Woodland Hills, CA 91364	1	U. of Missouri at Columbia ATTN: Professor R. Thompson Department of Chemistry Columbia, MO 65211
1	Sundstrand Aviation Oper. ATTN: Mr. Owen Briles P.O. Box 7002 Rockford, IL 61125	1	U. of Michigan ATTN: Prof. Gerard M. Faeth Department of Aerospace Engineering Ann Arbor, MI 48109-3796
1	Veritay Technology, Inc. ATTN: E. B. Fisher 4845 Millersport Highway, P.O. Box 305 East Amherst, NY 14051-0305	1	U. of Missouri at Columbia ATTN: Professor F. K. Ross Research Reactor Columbia, MO 65211
1	Director Applied Physics Laboratory The Johns Hopkins Univ. Johns Hopkins Road Laurel, Md 20707	1	U. of Missouri at Kansas City Department of Physics ATTN: Prof. R.D. Murphy 1110 East 48th Street Kansas City, MO 64110-2499
2	Director Chemical Propulsion Info Agency The Johns Hopkins Univ. ATTN: T. Christian Tech Lib Johns Hopkins Road Laurel, MD 20707	1	Pennsylvania State University Dept. of Mechanical Eng ATTN: K. Kuo University Park, PA 16802

# DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
2	Princeton Combustion Rsch Laboratories, Inc. ATTN: N.A. Messina M. Summerfield 475 US Highway One North Monmouth Junction, NJ 08852		
1	University of Arkansas Department of Chemical Engineering ATTN: J. Havens 227 Engineering Building Fayetteville, AR 72701		

## Aberdeen Proving Ground

Dir, USAMSAA  
ATTN: AMXSY-D  
AMXSY-MP, H. Cohen

Cdr, USATECOM  
ATTN: AMSTE-TO-F

CDR, CRDEC, AMCCOM  
ATTN: SMCCR-RSP-A  
SMCCR-MU  
SMCCR-SPS-IL

## USER EVALUATION SHEET/CHANGE OF ADDRESS

This Laboratory undertakes a continuing effort to improve the quality of the reports it publishes. Your comments/answers to the items/questions below will aid us in our efforts.

1. BRL Report Number \_\_\_\_\_ Date of Report \_\_\_\_\_
2. Date Report Received \_\_\_\_\_
3. Does this report satisfy a need? (Comment on purpose, related project, or other area of interest for which the report will be used.) \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_
4. How specifically, is the report being used? (Information source, design data, procedure, source of ideas, etc.) \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_
5. Has the information in this report led to any quantitative savings as far as man-hours or dollars saved, operating costs avoided or efficiencies achieved, etc? If so, please elaborate. \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_
6. General Comments. What do you think should be changed to improve future reports? (Indicate changes to organization, technical content, format, etc.) \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

CURRENT  
ADDRESS

\_\_\_\_\_  
Name

\_\_\_\_\_  
Organization

\_\_\_\_\_  
Address

\_\_\_\_\_  
City, State, Zip

7. If indicating a Change of Address or Address Correction, please provide the New or Correct Address in Block 6 above and the Old or Incorrect address below.

OLD  
ADDRESS

\_\_\_\_\_  
Name

\_\_\_\_\_  
Organization

\_\_\_\_\_  
Address

\_\_\_\_\_  
City, State, Zip

(Remove this sheet, fold as indicated, staple or tape closed, and mail.)

----- FOLD HERE -----

Director  
US Army Ballistic Research Laboratory  
ATTN: DRXBR-OD-ST  
Aberdeen Proving Ground, MD 21005-5066




NO POSTAGE  
NECESSARY  
IF MAILED  
IN THE  
UNITED STATES

OFFICIAL BUSINESS  
PENALTY FOR PRIVATE USE, \$300

**BUSINESS REPLY MAIL**  
FIRST CLASS PERMIT NO 12062 WASHINGTON, DC  
POSTAGE WILL BE PAID BY DEPARTMENT OF THE ARMY

Director  
US Army Ballistic Research Laboratory  
ATTN: DRXBR-OD-ST  
Aberdeen Proving Ground, MD 21005-9989

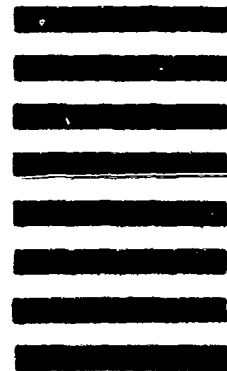

----- FOLD HERE -----